


ROTEX LITE

User friendly :


- * Complete lateral clearance of the plate
 - * Automatic opening by electromagnet
 - * Reversible C-shaped part & Quick Release
-
- Optimal heat & pressure distribution
 - Robust frame
 - Suitable for laser transfer applications & sublimation on textile and rigid materials
 - Ideal for small to medium productions
 - Manufactured in France
 - 2-year guarantee on the machine
 - 10-year guarantee on heating plate

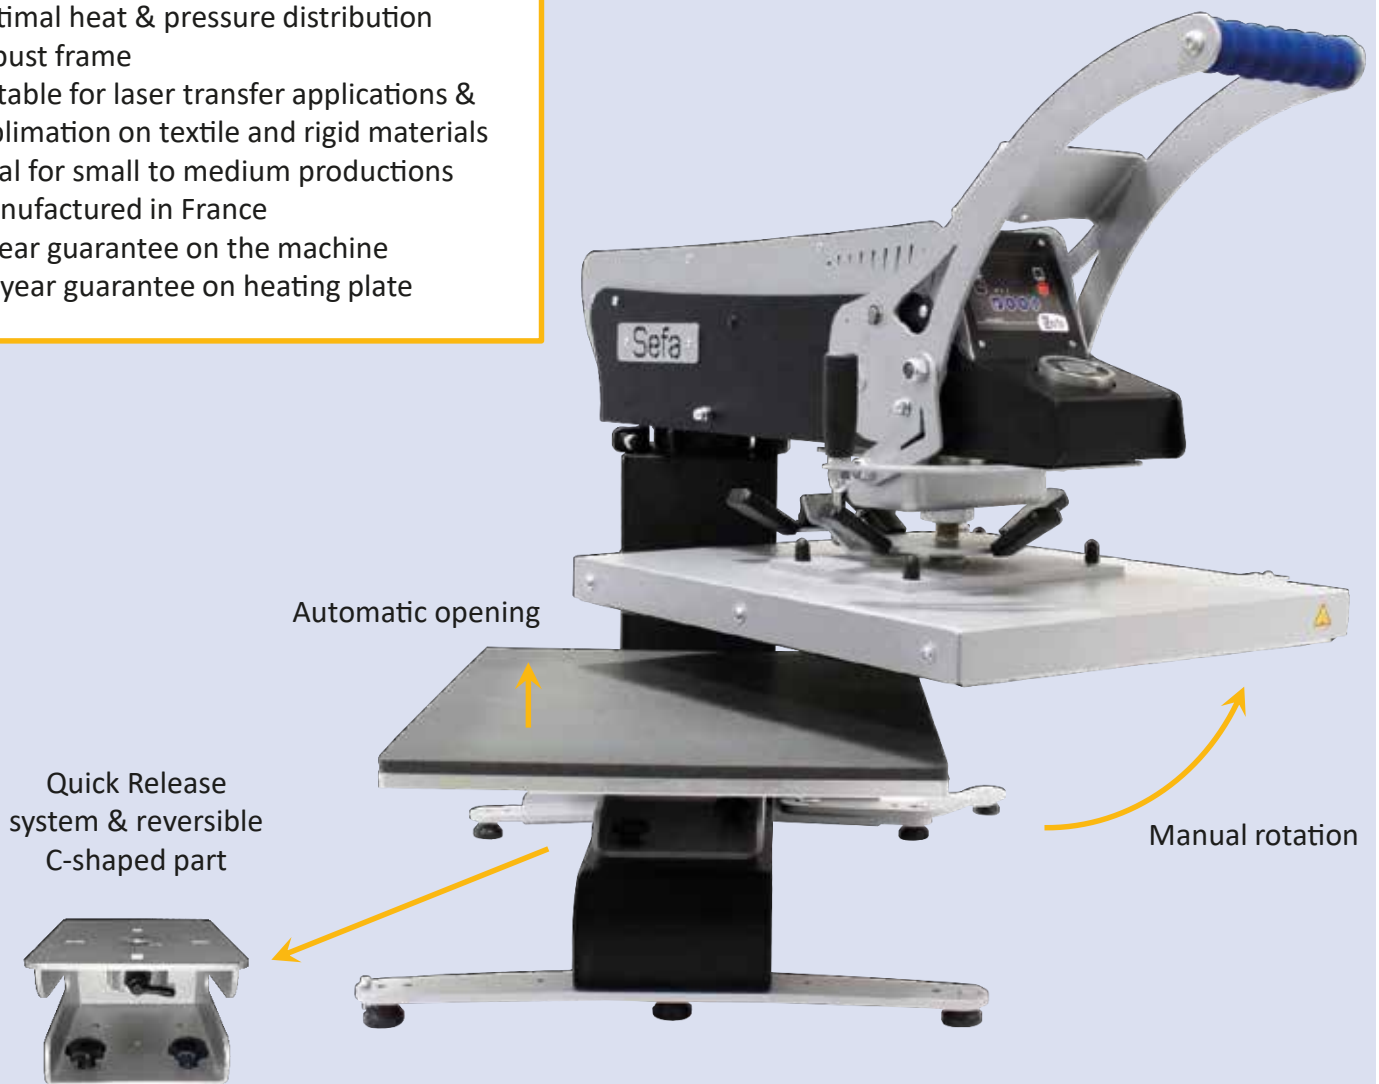


Accessories



Support table



Set of plates



Nomex® cover



Laser pointer

Technical characteristics

Plates size	40 x 50 cm
Weight	81 Kg
Maximal pressure	590 gr/cm ²
Max temperature	220°C
Power supply	240 V
Electric power	2500 W
Amperage	11 A

Settings



Electronics developed by Sefa.

Accurate and fast regulation (PID control) for a wide range of heat transfer products : Flex, flock, sublimation, screen printing transfer.



Advanced electronics

Double timer (main + pre-heat)
2 cycle counters,
3 settable programs
Stop cycle function


From 0 to 570 sec (precision +/- 1%).
From 0 to 220°C (precision +/- 1%).
Heating time to reach 180°C : 15 min.

Accessories




Table TAB-98 PRO

Strong support table for SEFA heat presses. Available with Castors.



Set of 4 plates PLA-QR:

Useful for precise work.
Dimensions:
12 x 8 cm - 15 x 15 cm
12 x 45 cm - 25 x 30 cm



Nomex® cover HOU-50 :

Heat resistant NOMEX® cover to protect the lower plate and make the threading easier.



Laser pointer CROI-161:

1-laser system to position your transfers with a greater precision. Possibility to add a second laser on the ramp.

Dimensions

